



P H G B 000 190
USA

BET
6:22:02
#2/PRIORITY
DOC

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

JCS32 U.S. PTO
10/028125
12/21/01

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

7 AUG 2001

The
Patent
Office

1/77

29DEC00 E594198-6 002879
P01/7700 0.00-0031616.6

Request for grant of a patent
(See notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

27 DEC 2000

1. Your reference PHGB000190

2. Patent application number
(The Patent Office will fill in this part)

0031616.6

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

076119294001

4. Title of the invention

POCKET

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Andrew G. White
Philips Corporate Intellectual Property
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it)

07658083001

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an
applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	11
Claims(s)	3
Abstract	1
Drawings	2

10. If you are also filing any of the following, state how many against each item:


Priority Documents

- Translations of priority documents
- Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)
- Request for preliminary examination and search (*Patents Form 9/77*)
- Request for substantive examination (*Patents Form 10/77*)
- Any other documents
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date 22/12/2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815365

(D.Melbourne)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

POCKET

5 The present invention relates to pockets suitable for incorporation in garments, luggage items, personal accessories or the like and in particular to pockets which are intended to prevent any items held in the pockets from falling out inadvertently.

10 It is commonplace to provide garments with pockets so that the owner can carry items around by placing them in the pockets. However, it is possible for items to be unintentionally ejected from or to fall out of those pockets due to movements of the user. This is particularly likely when a person begins to run which imparts a jolting motion to the pocket. When a person bends down
15 causing the pocket to adopt an orientation unsuitable for containing an object the object will fall out. In the latter case shirt pockets are particularly susceptible to this problem. At best the occurrence of an item falling out of a pocket is an inconvenience. However, where items are valuable the resulting loss of the item or damage caused to the item through it falling out of the
20 pocket can be a more serious issue. One known attempt to address this problem is through the inclusion of a fastening device such as a zip or button and hole arrangement to close the opening of the pocket. The provision of such devices can be beneficial but in certain cases can be detrimental to the appearance of the garment. Furthermore, such fastening devices require a
25 person to remember to actively fasten closed the pocket opening. If a person forgets to do this, items can fall out of pockets as before. Another issue is that where a person does actually remember to fasten the device, they must actively unfasten the device in order to access the interior of the pocket and retrieve items located in that pocket. In those cases where frequent access to
30 the pocket is required, the repeated task of fastening and unfastening of the pocket opening can become inconvenient which then discourages the user to fasten the pocket on a regular basis.

3

It is an object of the present invention to provide an improved pocket which is capable of reducing the likelihood of objects held therein from falling out inadvertently or being ejected accidentally.

In accordance with a first aspect of the present invention there is
5 provided a pocket suitable for incorporating in a garment, luggage item, personal accessory, or the like, said pocket including restriction means to restrict the insertion of objects into, or removal of objects from the pocket, the restriction means being controllable to cause the said restriction means to restrict to apply a restricting action on the occurrence of an enabling signal.
10 The restriction means may be provided in the form of mechanical means responding to the enabling signal.

Therefore on the occurrence of the enabling signal the restriction means is activated to restrict the insertion into or removal of objects from the pocket. Such restriction serves to reduce the likelihood of objects held either partially
15 or completely in the pocket from falling out inadvertently or being ejected accidentally.

The enabling signal may be generated at the command of the user. This allows the user to activate the restriction means at will which is typically done when the user is aware that they are about to commence an activity of
20 the type bringing about circumstances in which it is possible that items may be ejected from the pocket. A user may choose to activate the restriction means for other reasons, for example when the user becomes aware that they are in an environment where the probability of unauthorised removal of objects from the pockets is relatively high.

25 The enabling signal may be generated in response to output signal status of at least one sensor. The sensor may be an orientation sensor arranged to produce an output signal dependent on the orientation of the pocket, the output signal initiating generation of the enabling signal when the pocket adopts an orientation in which it is possible that objects placed in the
30 pocket will fall out.

A pocket featuring this arrangement is particularly suitable for use in the form of a shirt pocket. When someone wearing the shirt bends down towards

the ground the pocket opening may become positioned closer to the ground than the base of the pocket which can cause any objects carried in the pocket to fall out of the pocket opening under the influence of gravity. However, with the present arrangement when a person wearing a shirt having a pocket made in accordance with the present invention bends down towards the ground the orientation sensor may establish that the pocket opening is about to be positioned closer to the ground than the pocket base and produces an output signal to initiate generation of the enabling signal and cause activation of the restriction means. Preferably the orientation sensor initiates generation of the enabling signal whenever it is possible that objects placed in the pockets will fall out which in practice includes orientations in addition to the case where the pocket opening is closer to the ground than the pocket base, for example when the pocket base and pocket opening are generally at the same distance from the ground, or where the pocket opening is further from the ground than the pocket base but by only a relatively small amount .

The sensor may be an accelerometer arranged to produce an output signal dependent on acceleration experienced by the pocket, the output signal initiating generation of the enabling signal when the sensor output signal indicates that the pocket is undergoing jolting movement. Such movement may be experienced when the pocket is being worn by a person who is running, in which case activation of the restriction means will help to prevent ejection of items held in the pocket.

Other aspects and optional features of the present invention appear in the appended claims which are incorporated herein by reference, and to which the reader is now referred.

The present invention will now be described with reference to the Figures of the accompanying drawings in which:

Figure 1 is a schematic representation of functional components of a pocket made in accordance with the present invention;

Figure 2 shows a first embodiment of a pocket construction made in accordance with the present invention;



Figure 3 shows a second embodiment of a pocket construction made in accordance with the present invention; and

Figure 4 shows a third embodiment of a pocket construction made in accordance with the present invention.

5

Referring to Figure 1, the functional components of the pocket include a first sensor 2, a second sensor 4, user input device 6, controller 8, and actuator 10.

10 The first sensor 2 is an orientation sensor used to establish the orientation of the pocket. To perform this function the sensor is attached to the pocket itself, or where the pocket is fastened to an item, such as a garment, the sensor is attached to a portion of the item which will reliably reflect the orientation of the pocket.

15 The second sensor 4 is an accelerometer to measure the acceleration of the pocket. To perform this function the second sensor 4 is attached to the pocket itself, or where the pocket is fastened to an item, such as a garment, the sensor is attached to a portion of the item which will reliably reflect the acceleration experienced by the pocket.

20 The user input device 6 provides a user with a means to control pocket operation. This may be a simple switch or a more elaborate device. Output signals from sensors 2, 4, and user input device 6 are provided to controller 8. The signals provided to the controller 8 are used by the controller to determine if an enabling signal should be generated at controller output 9 which enabling signal is provided to actuator 10. The presence of the enabling signal at
25 controller output 9 causes actuator 10 to operate. By suitably incorporating actuator 10 in a pocket, operation of the actuator 10 will result in the pocket assuming a configuration which restricts or impedes the removal of any objects from the pocket as will be explained in more detail hereinafter.

30 Such configuration is capable of restricting or impeding such removal irrespective of whether the removal is attempted manually, involves the objects falling from the pocket or objects being ejected (thrown) from the pocket. Such



assumed configuration may also restrict or impede insertion of the objects into the pocket.

When the first sensor (orientation sensor) 2 determines that a pocket is substantially upright, that is the pocket is orientated with the pocket opening positioned at a higher level than the pocket base, an object placed inside the pocket will be held therein by gravity and will not have a tendency to fall out. While the pocket is in this orientation the output signal from the sensor 2 is such that the controller 8 does not cause the enabling signal to be generated at controller output 9 and the actuator 10 does not operate. Conversely, when the first orientation sensor 2 determines that the pocket is not substantially upright, that is where the pocket is orientated with a pocket opening positioned at a higher level than the pocket base but by a smaller amount than when the pocket is substantially upright, or where the orientation sensor 2 determines that the pocket opening is positioned at the same level as the pocket base or even at a lower level than the pocket base, any object placed inside the pocket will be more susceptible to falling out. While the pocket is in any of these configurations, the output signal from the sensor 2 causes the controller 8 to generate an enabling signal at the controller output 9. This in turn causes operation of the actuator 10 which results in the pocket assuming a configuration which restricts or impedes the removal of any objects held in the pocket.

When the pocket is experiencing acceleration due to jolting movement, the second sensor 4 (accelerometer) also experiences such acceleration and produces an output signal representing such acceleration. This signal is provided to the controller 8. In response to receiving this signal the controller 8 generates an enabling signal at the controller output 9. This in turn causes operation of the actuator 10. Such operation of the actuator results in the pocket assuming a configuration which restricts or impedes the removal or ejection of any objects held in the pocket.

A user may operate user input device 6 to instruct controller 8 to generate the enabling signal at controller output 9 causing the actuator 10 to operate. This causes the pocket to assume a configuration which restricts or

impedes the removal of objects therefrom, with such restriction or impeding action occurring at the command of the user.

Now that the main functional elements of a pocket of the present invention have been discussed, some example pocket configurations will be
5 described.

In a first embodiment a simple pocket construction 20 shown in Figure 2 includes a semi-rigid rear panel 22 and a flexible front panel 24. The rear panel 22 and the front panel 24 are joined to each other in the vicinity of their periphery along a first side edge 25a, a second side edge 25b and base edge
10 25c. The panels may be joined by any suitable technique such as gluing or stitching as will be appreciated by the person skilled in the art. However, the top edge portion 22T of the rear panel is not joined to the top edge portion 24T of the front panel 24 in order to form a pocket opening 26 allowing access to interior pocket space 27.

15 An actuator 10 is provided in the form of a shape memory material 28 provided as an elongate component extending across the front panel 24 from the first side edge 25a to the second side edge 25c adjacent to the top edge portion 24T of the front panel 24, that is in the vicinity of the pocket opening 26. The shape memory material 28 is anchored to the pocket 20 at location
20 29a in the region of the first side edge 25a and location 29b in the region of the second edge 25b. The anchor locations 29a and 29b are maintained in spaced relation to each other due to the properties of the semi-rigid rear panel 22.

The shape memory material 28 used in this embodiment is provided as a length of shape memory material. An example of such material is Nickel
25 Titanium alloy which is also known as Nitinol, although other shape memory materials include alloys known as Tinel, Flexinol, Muscle Wire, Smart Wire, Dynalloy, NiTi and TiNi.

The properties of shape memory alloys such as nickel titanium alloy are such that they undergo a phase transformation in their crystal structure with a
30 change in temperature. The temperature around which phase transformation takes place can be governed by controlling the alloy composition. When the material is at temperatures higher than the temperature range where phase

transformation occurs the material is in the so-called high temperature (austenite) form. While in this "high temperature" form the material will allow a substantial deformation to occur on the application of stress, but will return to its original shape on removal of the stress. When at temperatures lower than
5 the temperature range where the phase transformation occurs the material is in the so-called "low temperature" (martensite) form. While in this "low temperature" form the material can also be deformed but much more easily (that is with the application of less stress) than when the material is in the high temperature form. Furthermore, on removal of the stress, the material remains
10 in the deformed configuration and does not return to its original shape. However, if the material is now heated to its "high temperature" (austenite) state the material will return to its original shape, which is why the material is said to have "shape memory". Because much higher stresses are required to cause deformation to the material when in the austenite phase that are
15 required when in the martensite phase, the effect of heating deformed material from the low temperature martensite form to the high temperature austenite form is that the material can regain its original shape and may do so with considerable force. Such force is often greater than the stress that was applied to deform the material in the low temperature phase in the first place,
20 with the effect that the material may be capable of regaining its original shape even in the presence of the stress used to cause the deformation. This behaviour has resulted in nickel titanium alloy wire being known as "Muscle Wire".

The shape memory material (in this case a length of nickel titanium
25 alloy wire 28) is selected to be of a length such that in an original, substantially non deformed state it extends across the width of the front panel 24 in a relatively direct line between anchor points 29a and 29b. In general there will be substantially no slack in the wire. Such a direct line taken by the wire has the effect that it presses on the front panel 24 causing top edge portion 24T to
30 be held against the top edge portion of semi-rigid rear panel 22T which means that pocket opening 26 will be closed. In order to gain access to the interior pocket space 27 the front panel top edge portion 24T may be eased away

from the rear panel top edge portion 22T. This process of easing the front panel top edge portion with sufficient force causes the shape memory material to stretch (that is deform). While the shape memory material is in the low temperature (martensite) form the material may be deformed to a stretched condition without the application of excessive stress, and the material remains stretched even when the stress has been subsequently removed. A pocket is now in an "open" configuration exhibiting pocket opening 26 and items can be inserted into and removed from the pocket in the normal manner.

Now assume that the controller 8 produces an enabling signal at output 9. This may be due to action of the user operating user input device 6, due to signals received from sensor 2 indicating that the pocket is about assume or has already assumed an orientation where it is likely items will fall out of the pocket or due to signals received from sensor 4 indicating that the pocket is undergoing acceleration of the type where items could be ejected from the pocket. The enable signal 9 is provided to actuator 10, in this case shape memory material 28 to cause heating of the shape memory material 28 such that it attains its high temperature (Austenite) form. On making transition to this phase the material regains its original shape which means that the nickel titanium wire 28 contracts to assume a direct line between anchor point 29a and 29b, which in the process pulls front panel top portion 24T against rear panel top portion 22T to urge the pocket opening 26 to close up in a manner so as to restrict or impede the removal of objects from the interior pocket space (or insertion of objects into the pocket space). The shape memory material may be heated by use of an external heat source, induction heating mechanism or any suitable method, as will be apparent to the person skilled in the art. However in this arrangement the shape memory material is heated by passing an electric current through the nickel titanium alloy wire 28 itself which generates heat through the well known Joule heating mechanism.

On removal of the enabling signal 9 the shape memory material cools to the low temperature form in which it can again be stretched by the application of stress to allow access to the internal pocket space 27.



The shape memory material 28 may be attached to the front panel 24 between anchor points 29a and 29b by providing the panel 24 with a conduit, channel or plurality of loops through which the shape memory material passes. The actuator 10 may be provided in the form of one or a plurality of components, for example as a single strand of wire 28 or a bundle of wires 28 to provide the required characteristic behaviour, strength and even redundancy should a strand break.

In addition to or instead of providing shape memory material 28 at the top edge 24T of the panel near the opening, shape memory material may be arranged to extend across other regions of the pocket between first and second side edges 25a and 25b as is denoted by items 28'. These components 28' operate in a similar way to shape memory component 28 but not to close the pocket opening 26 itself. However, it will be appreciated that such components will still be capable of providing a restricting action to serve to retain some items in the pocket 20.

It is preferred that the shape memory material is of a composition such that any ambient temperatures in which the pocket is expected to be used will fall within the low temperature (martensite) range of the material in order to avoid unintentional operation.

A second embodiment is shown in Figure 3 which is similar to the first embodiment but which performs without the requirement of the rear panel 22 needing to be semi-rigid. In this arrangement the shape memory material 38 is anchored at points 39a, 39b located on a garment carrying the pocket rather than the pocket itself. The shape memory material 38 may be the same as the shape memory material 28 and in this instance operates in a similar manner to that described above. The shape memory material may be attached to the pocket front panel 34 by providing the panel with a conduit, channel, or plurality of loops through which the shape memory material passes. Further examples of shape memory material may be included at other portions of the pocket.

A third embodiment is shown in Figure 4 but here the shape memory material 48 is formed as a loop. The shape memory material 48 may be the



same as the shape memory material 28 or 38 and therefore operates in a similar manner to that described above. The shape memory material may be attached to the front panel 44 by providing the pocket with a conduit, channel or plurality of loops through which the shape memory material passes. However, because the shape memory material is formed as a loop it may be arranged within garments in a path that also forms a loop. For example, when the pocket is located on an arm section of a garment, which has a generally circular cross section, the loop may be arranged to circle the arm portion so as to travel around the arm of a person when wearing a jacket. On activation of the pocket a constricting action will pull the pocket front panel 44 towards the arm of the user therefore giving rise to a restricting action.

While the present invention has been described with reference to actuators formed of shape memory alloy, other techniques may be employed for providing an actuator capable of closing a pocket opening or providing a restricting action to secure any items in the pockets. Such possibilities include the provision of bimetallic strips fastened to portions of the pocket which strips are able to undergo a change in shape on occurrence of the enabling signal or use of electromagnetic or other devices capable of behaving as an actuator as required by a pocket of the present invention.

Furthermore, while a very simple pocket construction has been described and illustrated as comprising merely of a front panel and a rear panel this is for the purpose of clarity. In practice a pocket may take a different form with each panel consisting of one or more layers, and component parts of different shape, orientation or construction generally, as will be appreciated by persons skilled in the art. One or more portions of the pocket may be provided by a component of the garment, personal luggage item or other article to which the pocket is applied. Although the front panel of the pocket is described as the one acted on by the restriction means this is not to be construed as a limitation and it will be appreciated by the person skilled in the art that other pocket designs may use the restriction means to act on other components of the pocket while remaining within the scope of the present invention. While three sources of controller input signal sources have been described it is not

essential that all are present. The controller may be a logic device or microprocessor. Various components of the present invention may actually be incorporated as parts of other devices, especially in the form of wearable electronic apparatus and / or wearable computing apparatus.

5 From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of systems and devices and component parts thereof and which may be used instead of or in addition to features already described herein.

CLAIMS

1. A pocket suitable for incorporating in a garment, luggage item, personal accessory, or the like, said pocket including restriction means to
5 restrict the insertion of objects into, or removal of objects from the pocket, the restriction means being controllable to cause the said means to restrict to apply a restricting action on the occurrence of an enabling signal.

2. A pocket in accordance with claim 1 wherein the enabling signal
10 is generated at the command of a user.

3. A pocket in accordance with claim 1 wherein the enabling signal is generated in response to output signal status of at least one sensor.

15 4. A pocket in accordance with claim 3 wherein the sensor is an orientation sensor arranged to produce an output signal dependent on the orientation of the pocket, the output signal initiating generation of the enabling signal when the pocket adopts an orientation in which it is possible that objects placed in the pocket will fall out.

20 5. A pocket in accordance with claim 3 or 4 wherein the sensor is an accelerometer arranged to produce an output signal dependent on acceleration experienced by the pocket, the output signal initiating generation of the enabling signal when the sensor output signal indicates that the pocket
25 is undergoing jolting movement.

6. A pocket in accordance with any one or more of claims 1 to 5 wherein the pocket is provided with a closable access opening communicating with interior pocket space and said restriction means serves to urge closed
30 said access opening on the occurrence of the enabling signal.



7. A pocket in accordance with any one or more of claims 1 to 6 wherein the pocket includes at least one interior wall portion which delimits interior pocket space and said restriction means serves to urge the at least one interior wall portion on occurrence of the enabling signal so as to reduce interior pocket space volume and to clasp any objects occupying the interior pocket space.

8. A pocket in accordance with any one or more of claims 1 to 6 wherein the pocket includes at least two adjacent facing panels each delimiting interior pocket space and the restricting means serves to urge at least one of the panels towards the other one of the panels on occurrence of the enabling signal to clasp any objects occupying the interior pocket space.

9. A pocket in accordance with claim 6, 7 or 8 wherein the restricting means includes an actuator component disposed in the edge portions, in the at least one interior wall portion or in at least one of the panels, respectively, said actuator component undergoing a change in shape on occurrence of the enabling signal.

10. A pocket in accordance with claim 9 wherein the actuator component is comprised of a portion of nickel-titanium alloy which reverts to a pre-determined dimension on being subject to an increase in temperature from a first temperature lower than a transitional temperature to a second temperature higher than a transitional temperature.

11. A pocket in accordance with claim 10 wherein said increase in temperature is obtained through the mechanism of Joule heating by passing an electrical current through the nickel-titanium alloy.

12. A pocket in accordance with claim 9 wherein the actuator includes a bimetallic strip.

13. A pocket in accordance with any one or more of claims 1 to 12 wherein said restricting action terminates on cessation of the enabling signal.

14. A restriction means of any one or more of claims 1 to 13.

5

15. A garment, luggage item or personal accessory having the pocket of any one or more of claims 1 to 13.

16. A pocket substantially as described herein with reference to and /
10 or as illustrated in any one or more of the Figures of the accompanying drawings.



41

2



ABSTRACT**POCKET**

5 A pocket suitable for incorporation in garments, luggage items, personal accessories or the like is provided with an active mechanism and control apparatus to close the pocket. Such closing action may be triggered manually but can also be triggered automatically when the pocket is moved away from an upright orientation or experiences a jolting action. In one embodiment the
10 closing action is performed by a length of shape memory material 28 which contracts when heated to pull the pocket front panel top portion 24T against the rear panel top portion 22T and close the pocket opening 26.

[Figure 2]



1/2

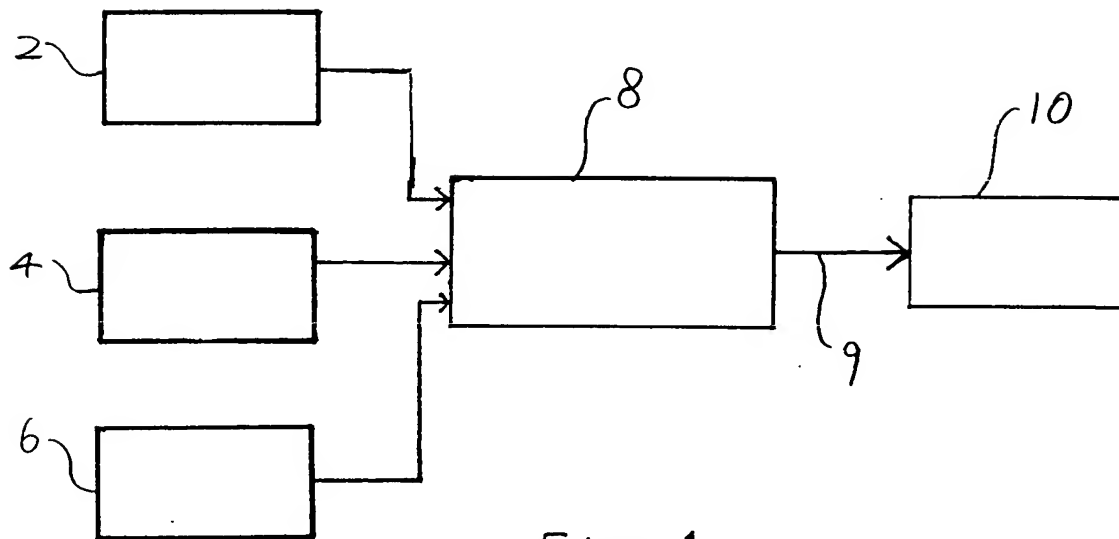


Figure 1

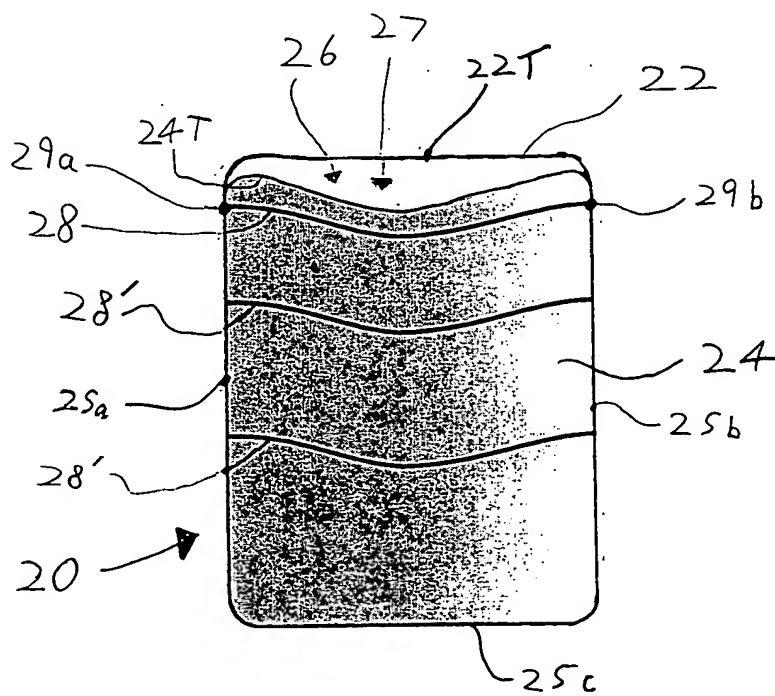


Figure 2



2/2

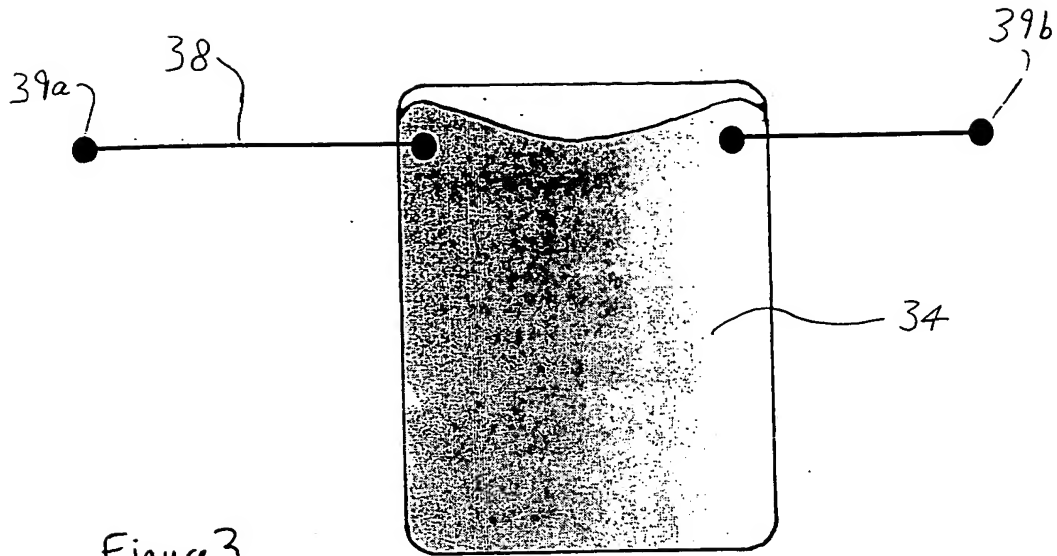


Figure 3

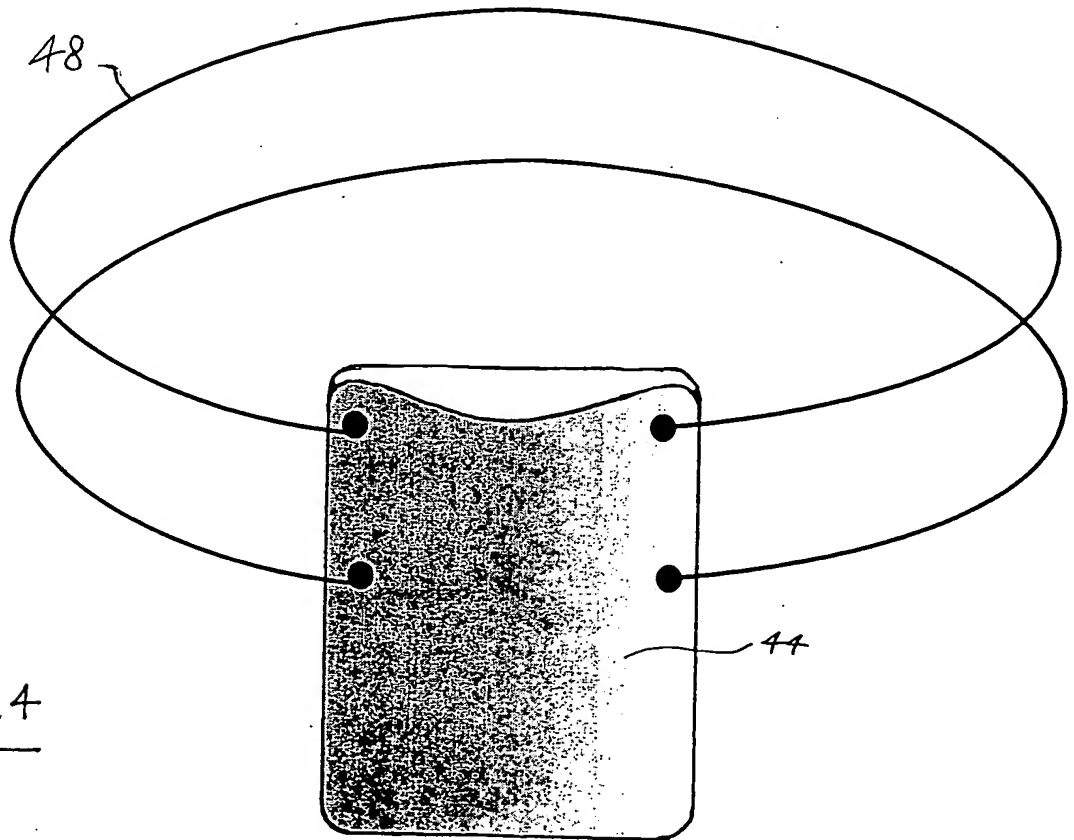


Figure 4

THIS PAGE BLANK (USPTO)